



Automotive Cable 3 Core - Trailer Cable

Australian Made

www.qvee.com.au





DESCRIPTION

Australian manufactured, high density automotive 3 core trailer cable with a coated copper conductor and the highest quality insulation.

Designed for top of the line caravan and trailer wiring.

Conforms to Australian Standard. RoHS Compliant.

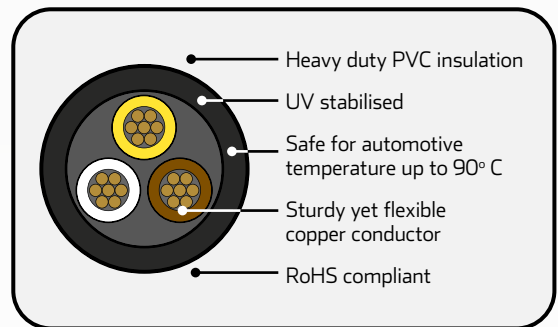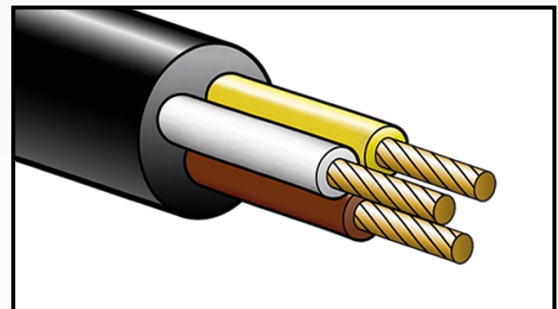

Conductor	• Plain Copper Conductor to AS1125
Insulation	• UV stabilised V90-HT PVC to AS 3808:2000
Voltage	• AC 50V / DC 120V to AS/NZS 3000:2000
Temperature Rating	• 90° C
Number of Cores	• 3 Cores
Applications	• Caravan & Trailer Wiring

TECHNICAL SPECIFICATIONS

Part Number.	Roll Length	Automotive Size	mm ²	Stranding	Amperage	Colour
AT2303C	30m	2mm	2mm Auto (0.56mm ²)	9/0.30	5 Amps	Black Sheath / White, Yellow, Brown Inner
AT21003C	100m	2mm	2mm Auto (0.56mm ²)	9/0.30	5 Amps	Black Sheath / White, Yellow, Brown Inner
3303C	30m	3mm	3mm Auto (1.13mm ²)	16/0.30	10 Amps	Black Sheath / White, Yellow, Brown Inner
31003C	100m	3mm	3mm Auto (1.13mm ²)	16/0.30	10 Amps	Black Sheath / White, Yellow, Brown Inner
AT4303C	30m	4mm	4mm Auto (1.84mm ²)	26/0.30	15 Amps	Black Sheath / White, Yellow, Brown Inner