



Automotive Cable 5 Core - Trailer Cable

Australian Made

www.qvee.com.au





DESCRIPTION

Australian manufactured, high density automotive 5 core trailer cable with a plain copper conductor and the highest quality insulation.

Designed for top of the line caravan and trailer wiring.

Conforms to Australian Standard. RoHS Compliant.

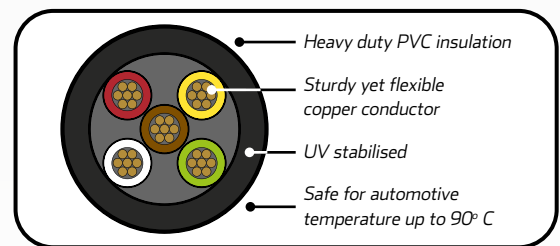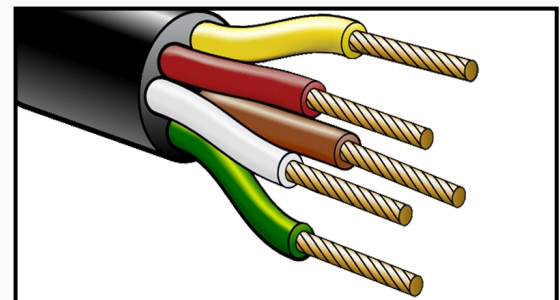

Conductor	• Plain Copper Conductor to AS1125
Insulation	• UV stabilised V90-HT PVC to AS 3808:2000
Voltage	• AC 50V / DC 120V to AS/NZS 3000:2000
Number of Cores	• 5 Cores
Temperature Rating	• 90° C

TECHNICAL SPECIFICATIONS

Part No.	Roll Length	Automotive Size	mm ²	Stranding	Amperage	Colour
2305C	30m	2mm	2mm Auto (0.56mm ²)	7/0.32	5 Amps	
21005C	100m					
3305C	30m	3mm	3mm Auto (1.13mm ²)	16/0.30	10 Amps	
31005C	100m					
4305C	30m	4mm	4mm Auto (1.84mm ²)	26/0.30	15 Amps	
41005C	100m					
AT6305C	30m	6mm	6mm Auto (5.22mm ²)	65/0.32	30 Amps	
AT61005C	100m					