



HD30 Series Plugs

Size 18 Shell




www.te.com

www.qvee.com.au


DESCRIPTION

These industry proven connectors are environmentally sealed to IP67 standards. Able to be used in both inline and bulk head applications. Specifically designed for the truck, mining and construction industry.

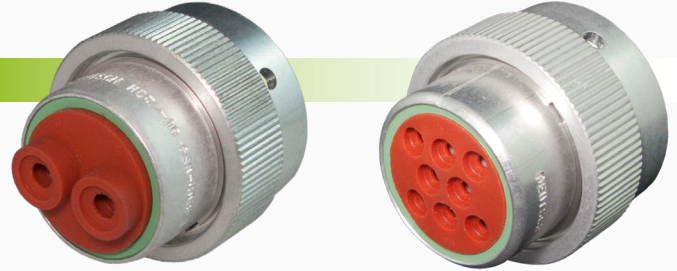


TECHNICAL SPECIFICATIONS


CONFIGURATIONS




18-6
2 x size 4, 4 x blank




18-8
8 x size 12



18-14
14 x size 16



18-20
2 x size 16, 18 x size 20



18-21
21 x size 20

Amperage Rating:

- Size 20 - 7.5A
- Size 16 - 13A
- Size 12 - 25A
- Size 8 - 60A
- Size 4 - 100A

IP Rating	• IP67 rated	Grommet Material	• Silicone rubber
Operating Temperature	• -55 to 125°C	Insert Material	• Unfilled PEI
Voltage Rating	• 250 Volt AC / DC	Coupling & Shell Material	• Aluminium

PART NUMBERS

Part No.	Dimensions	Terminals	Descriptions
HD36-18-6SN	42.97mm x 38.61mm x 42.98mm	2 x size 4 sockets, 4 blanks	6 circuit plug. Takes 2 x size 4 sockets (4 blanks)
HD36-18-8PN	42.98mm x 38.61mm x 42.98mm	8 x size 12 pins	8 circuit plug. Takes 8 x size 12 pins
HD36-18-8SN	42.98mm x 38.61mm x 42.98mm	8 x size 12 sockets	8 circuit plug. Takes 8 x size 12 sockets
HD36-18-14PN	42.98mm x 38.61mm x 42.98mm	14 x size 16 pins	14 circuit plug. Takes 14 x size 16 pins
HD36-18-14PE	42.98mm x 38.61mm x 42.98mm	14 x size 16 pins	14 circuit plug. Takes 14 x size 16 pins. Extra thin walled cable seals
HD36-18-14SN	42.98mm x 38.61mm x 42.98mm	14 x size 16 sockets	14 circuit plug. Takes 14 size 16 sockets
HD36-18-21SN	42.98mm x 38.61mm x 42.98mm	21 x size 20 sockets	21 circuit plug. Takes 21 x size 20 sockets