



Battery Cable Lugs

99.9% Purity Copper


www.qvee.com.au



DESCRIPTION

QVEE's copper cable lugs are of the highest quality and are manufactured from 99.9% copper to give you the best conductivity. They are tin plated to provide corrosion resistance and have a continuous operating maximum temperature of 155° Celcius.

Material	• High conductivity annealed copper (99.9% purity)
Material Finish	• Electrolytic tin plated (minimum 3 microns)
Operating Temp	• -55°C to 155°C
Voltage Rating	• 35kV maximum voltage rating
Approval	• AS 4325.1

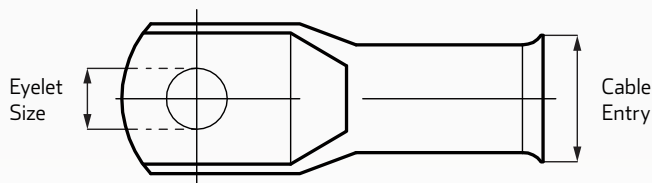

PART NUMBERS

Pack of 10 Part No.	Pack of 50 Part No.	Cable Entry	Eyelet Size	B&S Size
CTL1.5-5/10	-	• 1.5mm ²	• 5mm	-
CTL1.5-6/10	-	• 1.5mm ²	• 6mm	-
CTL2.5-4/10	-	• 2.5mm ²	• 4mm	-
CTL2.5-5/10	-	• 2.5mm ²	• 5mm	-
CTL2.5-6/10	-	• 2.5mm ²	• 6mm	-
CTL2.5-8/10	-	• 2.5mm ²	• 8mm	-
CTL4-5/10	-	• 4mm ²	• 5mm	-
CTL4-6/10	-	• 4mm ²	• 6mm	-
CTL4-8/10	-	• 4mm ²	• 8mm	-
CTL4-10/10	-	• 4mm ²	• 10mm	-
CTL6-5/10	-	• 6mm ²	• 5mm	-
CTL6-6/10	-	• 6mm ²	• 6mm	-
CTL6-8/10	-	• 6mm ²	• 8mm	-
CTL6-10/10	-	• 6mm ²	• 10mm	-
QVCTL10-5/10	QVCTL10-5/50	• 10mm ²	• 5mm	• 8B&S
QVCTL10-6/10	QVCTL10-6/50	• 10mm ²	• 6mm	• 8B&S
QVCTL10-8/10	QVCTL10-8/50	• 10mm ²	• 8mm	• 8B&S
QVCTL10-10/10	QVCTL10-10/50	• 10mm ²	• 10mm	• 8B&S
QVCTL10-12/10	QVCTL10-12/50	• 10mm ²	• 12mm	• 8B&S
QVCTL16-6/10	-	• 16mm ²	• 6mm	• 6B&S
QVCTL16-8/10	QVCTL16-8/50	• 16mm ²	• 8mm	• 6B&S
QVCTL16-10/10	QVCTL16-10/50	• 16mm ²	• 10mm	• 6B&S
QVCTL16-12/10	-	• 16mm ²	• 12mm	• 6B&S
QVCTL25-6/10	-	• 25mm ²	• 6mm	• 3B&S
QVCTL25-8/10	-	• 25mm ²	• 8mm	• 3B&S
QVCTL25-10/10	-	• 25mm ²	• 10mm	• 3B&S

Pack of 10 Part No.	Pack of 50 Part No.	Cable Entry	Eyelet Size	B&S Size
QVCTL25-12/10	-	• 25mm ²	• 12mm	• 3B&S
QVCTL35-6/10	-	• 35mm ²	• 6mm	• 2B&S
QVCTL35-8/10	-	• 35mm ²	• 8mm	• 2B&S
QVCTL35-10/10	-	• 35mm ²	• 10mm	• 2B&S
QVCTL35-12/10	-	• 35mm ²	• 12mm	• 2B&S
QVCTL50-6/10	-	• 50mm ²	• 6mm	• 0B&S
QVCTL50-8/10	-	• 50mm ²	• 8mm	• 0B&S
QVCTL50-10/10	-	• 50mm ²	• 10mm	• 0B&S
QVCTL50-12/10	-	• 50mm ²	• 12mm	• 0B&S
QVCTL70-6/10	-	• 70mm ²	• 6mm	• 00B&S
QVCTL70-8/10	-	• 70mm ²	• 8mm	• 00B&S
QVCTL70-10/10	-	• 70mm ²	• 10mm	• 00B&S
QVCTL70-12/10	-	• 70mm ²	• 12mm	• 00B&S
QVCTL95-8/10	-	• 95mm ²	• 8mm	• 000B&S
QVCTL95-10/10	-	• 95mm ²	• 10mm	• 000B&S
QVCTL95-12/10	-	• 95mm ²	• 12mm	• 000B&S
QVCTL120-10/10	-	• 120mm ²	• 10mm	• 0000B&S
QVCTL120-12/10	-	• 120mm ²	• 12mm	• 0000B&S
CTL120-16/10	-	• 120mm ²	• 16mm	• 0000B&S
CTL150-8/10	-	• 150mm ²	• 8mm	-
CTL150-10/10	-	• 150mm ²	• 10mm	-
CTL150-12/10	-	• 150mm ²	• 12mm	-
CTL185-10/10	-	• 185mm ²	• 10mm	-
CTL185-12/10	-	• 185mm ²	• 12mm	-
CTL185-16/10	-	• 185mm ²	• 16mm	-