



## Battery Lug Assortment Kit

#QVBCLKIT

www.qvee.com.au

### DESCRIPTION


181 piece battery cable lug assortment kit.  
 Sizes range from 10mm<sup>2</sup> to 70mm<sup>2</sup> in assorted eyelet sizes.

They are of the highest quality and are manufactured from 99.9% copper to give you the best conductivity. They are tin plated to provide corrosion resistance and have a continuous operating temperature of 155° C. Our lugs are bell mouthed as standard in sizes 10mm<sup>2</sup> to 70mm<sup>2</sup> so flexible cables are easier to terminate.



### TECHNICAL SPECIFICATIONS

<b>Material</b>	• 99.9% oxygen free pure copper with electro tin
<b>Operating Temp</b>	• Up to 155°C
<b>Voltage Rating</b>	• Rated up to 35 kV
<b>Approval</b>	• AS/NZS 4325:1995

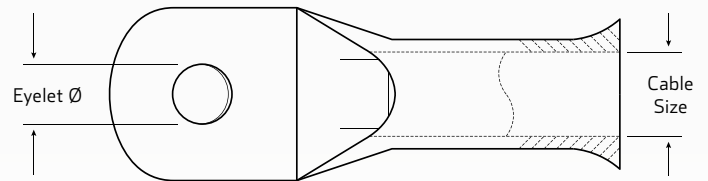

### COMPRISES

Part Number.	Eyelet Size	Cable Size	Qty
CTL10-6	• 6mm	• 10mm <sup>2</sup> (8B&S)	10
CTL10-8	• 8mm	• 10mm <sup>2</sup> (8B&S)	10
CTL10-10	• 10mm	• 10mm <sup>2</sup> (8B&S)	10
CTL16-6	• 6mm	• 16mm <sup>2</sup> (6B&S)	10
CTL16-8	• 8mm	• 16mm <sup>2</sup> (6B&S)	10
CTL16-10	• 10mm	• 16mm <sup>2</sup> (6B&S)	10
CTL25-6	• 6mm	• 25mm <sup>2</sup> (3B&S)	10
CTL25-8	• 8mm	• 25mm <sup>2</sup> (3B&S)	10
CTL25-10	• 10mm	• 25mm <sup>2</sup> (3B&S)	10

Part Number.	Eyelet Size	Cable Size	Qty
CTL35-6	• 6mm	• 35mm <sup>2</sup> (2B&S)	10
CTL35-8	• 8mm	• 35mm <sup>2</sup> (2B&S)	10
CTL35-10	• 10mm	• 35mm <sup>2</sup> (2B&S)	10
CTL50-8	• 8mm	• 50mm <sup>2</sup> (0B&S)	10
CTL50-10	• 10mm	• 50mm <sup>2</sup> (0B&S)	10
CTL50-12	• 12mm	• 50mm <sup>2</sup> (0B&S)	10
CTL70-8	• 8mm	• 70mm <sup>2</sup> (00B&S)	10
CTL70-10	• 10mm	• 70mm <sup>2</sup> (00B&S)	10
CTL70-12	• 12mm	• 70mm <sup>2</sup> (00B&S)	10