


## Mine Bar with LED Beacon & Front Facing Indicators

#RHBARI250JGFF


www.qvee.com.au

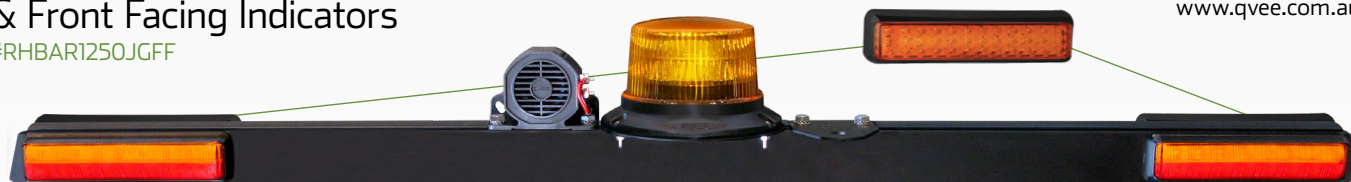

### COMPRISES

Part No.	Description	Qty
QVRB1	• Black alloy mine bar	• 1
QVCNKIT	• Channel nut kit	• 3
QVRB162	• "QVEE" Heavy duty LED amber beacon	• 1
201BSTIB	• "LED Autolamps" stop/tail/indicators	• 2
200BAM	• "LED Autolamps" front facing indicators	• 2
QVRABWS	• "QVEE" 97dB dual tone reverse alarm	• 1
QVBRK5	• Black, powder coated flag/worklight bracket	• 1

### DIMENSIONS

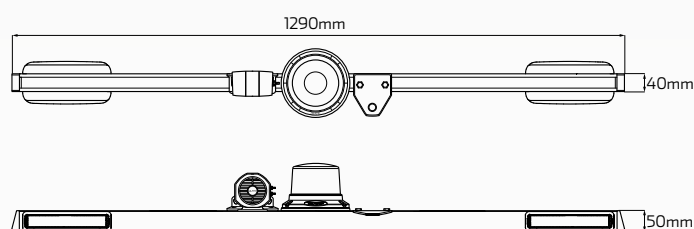

- Accessories come pre-assembled
- Beacon is mounted with BRK1, round beacon bracket
- Comes pre-wired with 2 pin male Deutsch connector & 7 core trailer cable

### TECHNICAL SPECIFICATIONS

#### GENERAL SPECIFICATIONS

Dimensions	• 1290mm L x 50mm H x 40mm D
Cable Wiring	• 3mm 7 core trailer cable (5m)

#### BEACON - QVRB162

LED Count	• 12 high powered LED's - 1500 Lumens
Input Voltage	• 10 - 30 Volt DC, 36 Watt
Colour	• Amber, 6 different flash patterns
IP Rating	• IP67 Rated

#### REVERSE ALARM - QVRABWS

Sound Type	• "Beep Beep" & "Shhh Shhh" (change via switch)
IP Rating	• IP66 Rated
Decibel Level	• 97dB

#### FLAG / WORKLIGHT BRACKET - QVBRK5

Mounting Hole	• 14mm Diameter
Coating	• Black Powder Coating

#### STOP / TAIL / INDICATOR - 201BSTIB

Input Voltage	• 12 Volt only
IP Rating	• IP67 Rated
Approvals	<ul style="list-style-type: none"> <li>• Stop - ADR Category 49/00 CRN 46885</li> <li>• Tail - ADR Category 49/00 CRN 46885</li> <li>• Indicator - ADR Category 49/00 CRN 46884</li> </ul>

#### FRONT FACING INDICATOR - 200BAM

Input Voltage	• 12 - 24 Volt
IP Rating	• IP67 Rated
Approvals	• Indicator - ADR Category 6-00-2A CRN 35795

# 1250MM / 1375MM / 1500MM MINE BAR

## Wiring Diagram

### Wiring Diagram\*:

