

Automotive Single Core Gas Cable - Double Insulated

Australian Made



www.qvee.com.au



DESCRIPTION

Australian manufactured, high density gas cable with a copper conductor and the highest quality insulation.

Designed for gas conversions. Conforms to Australian Standards. RoHS Compliant.

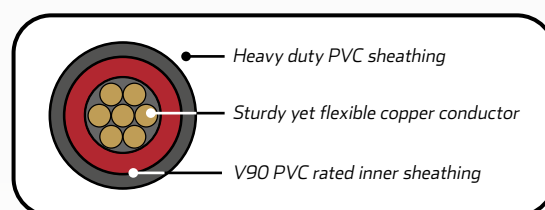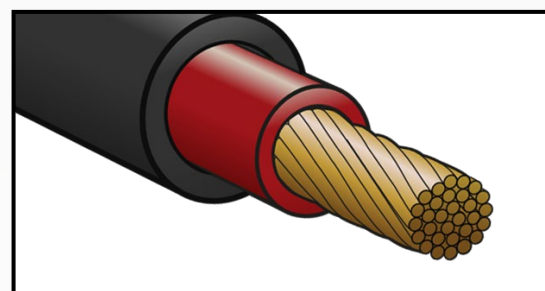

| | |
|-------------------|--|
| Conductor | • Plain Copper Conductor to AS1125 |
| Insulation | • V90 PVC to AS 3808:2000 |
| Voltage | • AC 50V / DC 120V to AS/NZS 3000:2000 |
| Approval | • RoHS Compliant |

TECHNICAL SPECIFICATIONS

| Part No. | Roll Length | Automotive Size | mm ² | Stranding | Amperage | Colour | |
|----------|-------------|-----------------|---------------------|-----------|----------|---|--------------------------|
| 330GAS | 30 Meter | 3mm | 1.13mm ² | 16/0.30 | 10 Amps |  | Black Sheath / Red Inner |
| 3100GAS | 100 Meter | 3mm | 1.13mm ² | 16/0.30 | 10 Amps |  | Black Sheath / Red Inner |
| 430GAS | 30 Meter | 4mm | 1.84mm ² | 26/0.30 | 15 Amps |  | Black Sheath / Red Inner |
| 4100GAS | 100 Meter | 4mm | 1.84mm ² | 26/0.30 | 15 Amps |  | Black Sheath / Red Inner |
| 630GAS | 30 Meter | 6mm | 4.59mm ² | 65/0.30 | 30 Amps |  | Black Sheath / Red Inner |
| 6100GAS | 100 Meter | 6mm | 4.59mm ² | 65/0.30 | 30 Amps |  | Black Sheath / Red Inner |